





Rev.1_21.07.16

UNDERGROUND WATER TANK

ECODEPUR[®] RS



 Z. I. Casal dos Frades, 68
2435-661 Seiça - Ourém

 T. +351 249 571 500
F. +351 249 571 501

 W. www.ecodepur.pt
@. geral@ecodepur.pt

PRESENTATION

Underground Water Tanks ECODEPUR® RS is a equipment used to storage rainwater, drinking water or wastewaters.

ADVANTAGES


- High mechanical resistance and corrosion protection;
- Totally watertight;
- Light and easy to install and maintain;



MAIN CHARACTERISTICS

- Manufactured with anti-UV additive, by rotomoulding system, which gives a high mechanical resistance and corrosion protection to the equipment;
- Black Colour;
- Polyethylene Cover ϕ 400 mm.

DIMENSIONS

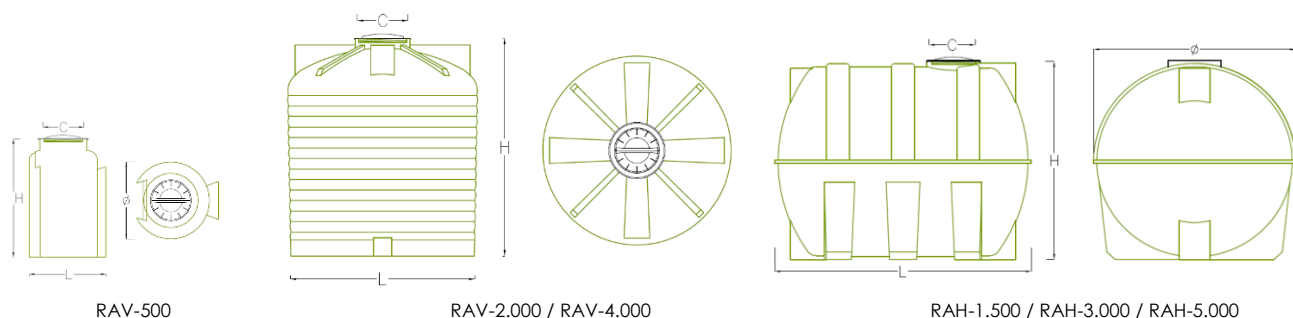

TYPE	VOLUME TOTAL (l)	Ø (mm)	L (mm)	H (mm)	C (mm)	WEIGHT (Kg)
RSV-500	500	710	765	1.215	400	32
RSH-1.500	1.500	1.210	1.350	1.250	400	45
RSV-2.000	2.000	1.530	-	1.620	400	60
RSH-3.000	3.000	1.500	1.910	1.540	400	95
RSV-4.000	4.000	1.890	-	1.910	400	120
RSH-5.000	5.000	1.800	2.360	1.870	400	150

The pictures and dimensions can be changed without notice.

INSTALLATION

Underground Water Tanks ECODEPUR[®] RS installation must follow the recommendations of the document supplied **Installation PE Reactors/Tanks (< 10.000 l)**.

In case of any doubt do not hesitate to contact our technical services.

MAINTENANCE

Maintenance operations will depend on the purpose of the tank.

GUARANTEE

Five (5) years, covering any manufacturing defects.

ECODEPUR[®] – Tecnologias de Protecção Ambiental, Lda will be responsible for introducing corrective measures aimed at correct equipment operation, if necessary.