





Rev.1\_21.07.16

# UNDERGROUND WATER TANK

## ECODEPUR<sup>®</sup> RSH



 Z. I. Casal dos Frades, 68  
2435-661 Seiça - Ourém

 T. +351 249 571 500  
F. +351 249 571 501


 W. [www.ecodepur.pt](http://www.ecodepur.pt)  
@. [geral@ecodepur.pt](mailto:geral@ecodepur.pt)

## PRESENTATION

**Underground Water Tanks ECODEPUR<sup>®</sup> RSH** is a equipment used to storage rainwater, drinking water or wastewaters.

## ADVANTAGES


- High mechanical resistance and corrosion protection;
- Totally watertight;
- Light and easy to install and maintain.

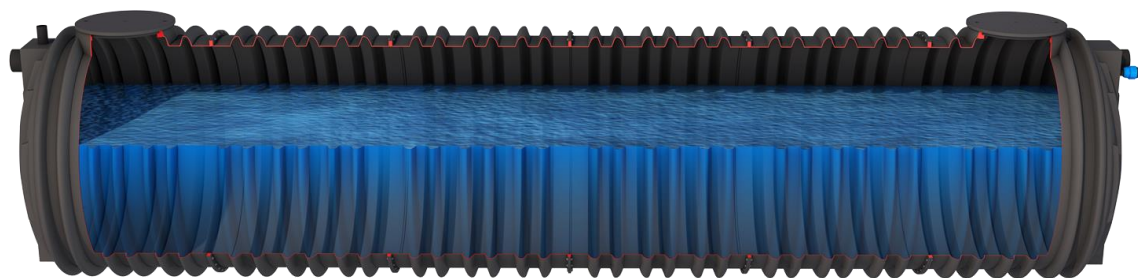

## MAIN CHARACTERISTICS

- Manufactured with anti-UV additive, by rotomoulding system, which gives a high mechanical resistance and corrosion protection to the equipment;
- Black Colour;
- Polyethylene Cover  $\phi$  790 mm.

## DIMENSIONS

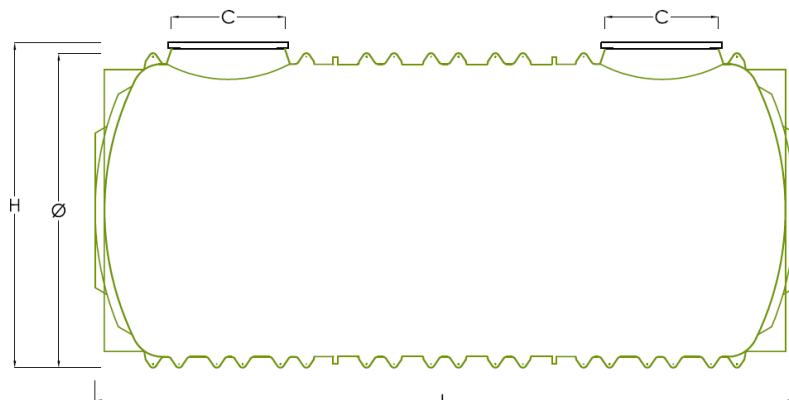

TYPE	VOLUME TOTAL (l)	Ø (mm)	L (mm)	H (mm)	C (mm)	WEIGHT (Kg)
RSH-10.000	10.000	2.190	3.440	2.265	790	430
RSH-15.000	15.000	2.190	4.980	2.265	790	610
RSH-20.000	20.000	2.190	6.520	2.265	790	790
RSH-25.000	25.000	2.190	8.060	2.265	790	970
RSH-30.000	30.000	2.190	9.600	2.265	790	1.150
RSH-35.000	35.000	2.190	11.140	2.265	790	1.330
RSH-40.000	40.000	2.190	12.680	2.265	790	1.510
RSH-45.000	45.000	2.190	14.220	2.265	790	1.690
MR RSH-50.000	50.000	2.980	8.420	3.050	790	2.150
MR RSH-60.000	60.000	2.980	9.990	3.050	790	2.550
MR RSH-70.000	70.000	2.980	11.560	3.050	790	2.950
MR RSH-80.000	80.000	2.980	13.130	3.050	790	3.350
MR RSH-90.000	90.000	2.980	14.700	3.050	790	3.750
MR RSH-100.000	100.000	2.980	16.270	3.050	790	4.150
MR RSH-110.000	110.000	2.980	17.840	3.050	790	4.550
MR RSH-120.000	120.000	2.980	19.410	3.050	790	4.950

The pictures and dimensions can be changed without notice.

## INSTALLATION

**Underground Water Tanks ECODEPUR<sup>®</sup> RSH** installation must follow the recommendations of the document supplied **Installation PE Reactors/Tanks (Ø 2.190 ou Ø2.980)**.

**In case of any doubt do not hesitate to contact our technical services.**

## MAINTENANCE

Maintenance operations will depend on the purpose of the tank.

## GUARANTEE

**Five (5) years**, covering any manufacturing defects.

**ECODEPUR<sup>®</sup> – Tecnologias de Protecção Ambiental, Lda** will be responsible for introducing corrective measures aimed at correct equipment operation, if necessary.