

LIGHT LIQUID SEPARATOR ECODEPUR® DEPUROIL® NS10/12

TECHNICAL INFORMATION


ECODEPUR® DEPUROIL® is Light Liquid Separator destined to clean water polluted with light free floating liquids such as engine oils, gas, oil etc, Class 1 in according of EN 858, with double coalescent cell and automatic closure device.



ECODEPUR® DEPUROIL® Separators has CE marking, in accordance with the legal obligations that stems from the entry into force of the Regulation (UE) N.º 305/2011 of Construction Products, fulfilling all the requisites of the European Standard EN 858-1:2002.

EUROPEAN STANDARD	EN 858-1
EQUIPMENT IDENTIFICATION	Light Liquid Separator
MARCA	ECODEPUR®
TYPE	DEPUROIL® NS10/12
CLASS EN 858-1	Class 1 (<5,0 mg "Mineral Oils"/l ⁽¹⁾)
NOMINAL SIZE	10/12 l/s
COALESCENT CELL	Double (lamellar/fibrillar)
AUTOMATIC CLOSURE DEVICE	Included (system always calibrated)
VOLUME PRE-SLUDGE TRAP	1.820 l
OIL STORAGE	3.160 l
FIRE CLASS REACTION	F
MATERIAL	Polyethylene
VENTE POINT	Included (1 1/2")
COVER	Polyethylene

⁽¹⁾ Teste conditions EN 858-1

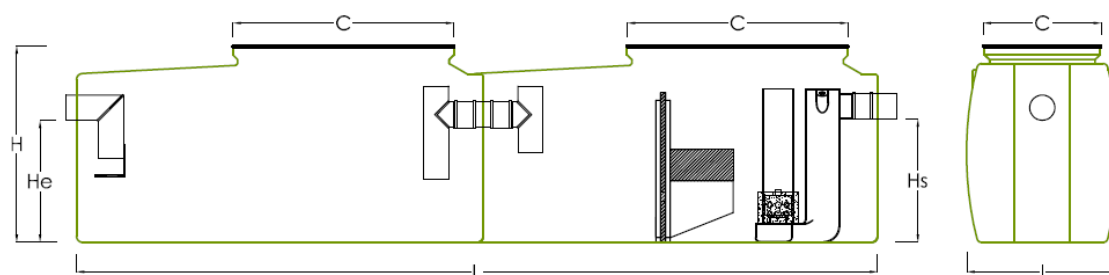

TYPE	NS (l/s)	VOLUME (l)	L (mm)	I (mm)	H (mm)	He (mm)	Hs (mm)	C (mm)	Ø PIPE (mm)	WEIGHT (kg)
DEPUROIL® NS 10/12	10,0/12,0	4.820	5.080	960	1.230	880	770	2 x (750 X 1415)	160	310

Rev.1_02.03.16 | The pictures and dimensions can be changed without notice.



W. www.ecodepur.pt
@. geral@ecodepur.pt



T. +351 249 571 500
F. +351 249 571 501



Z. I. Casal dos Frades, 68
2435-661 Seíça - Ourém



grupohenriques